

ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable

24 F, Single-mode (OS2)

CORNING

Corning ALTOS® Lite™ gel-free double-jacket, double-armored cables are rugged cables designed for direct-buried installations. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

Features and Benefits

Two jacket layers and two steel tape armor layers

Provides superior rodent resistance for direct-buried applications

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

Gel-free waterblocking technology

Craft-friendly cable preparation

Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)


Exceeds the RDUP requirements for mid-span buffer tube slack storage

Provides flexibility for mid-span access applications


Standards

Approval and Listings	USDA Rural Development Programs
------------------------------	---------------------------------

Design and Test Criteria	ANSI/ICEA S-87-640
---------------------------------	--------------------

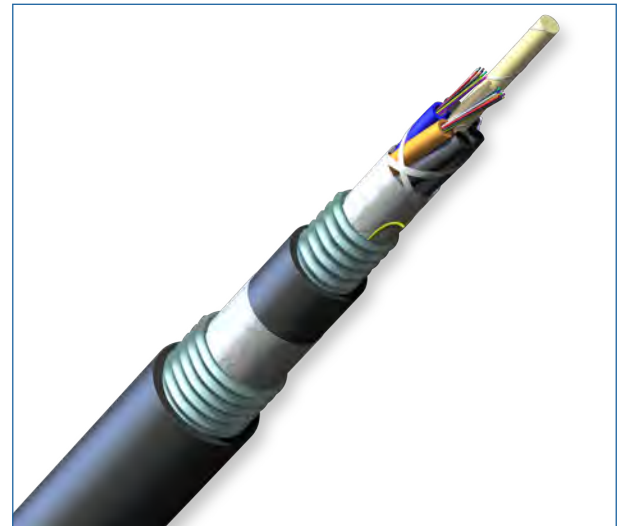

Part Number: 024EUD-T4101D20

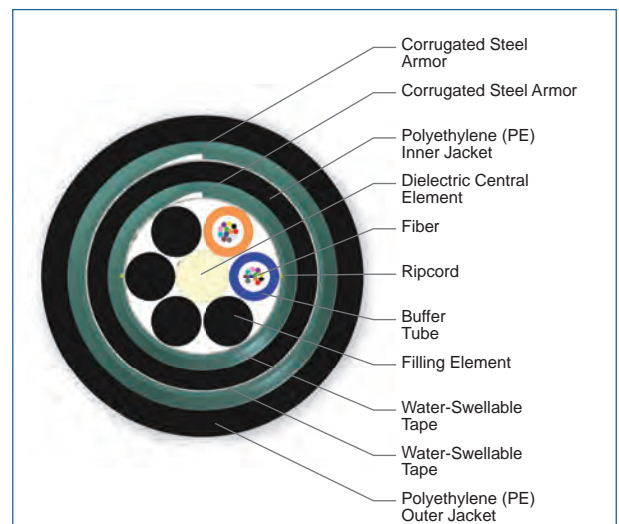

Cross Section of Part Number: 024EUD-T4101D20

CORNING

ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable

24 F, Single-mode (OS2)

CORNING

Specifications

General Specifications

Environment	Outdoor
Application	Direct Buried
Cable Type	Loose Tube
Product Type	Armored
Fiber Category	Single-mode (OS2)

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	24
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	2
Buffer Tube Color Coding	Blue, Orange
Buffer Tube Diameter	2.5 mm (0.1 in)
Tape	Water-swellaable
Number of Filling Elements	4
Tensile Strength Elements and/or Armoring - Layer 1	Corrugated steel tape armor
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 2	Water-swellaable
Number of Ripcords	4
Tensile Strength Elements and/or Armoring - Layer 2	Corrugated steel tape armor
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

CORNING

ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable

24 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	247 kg/km (166 lb/1000 ft)
Nominal Outer Diameter	16.1 mm (0.63 in)
Min. Bend Radius Installation	242 mm (9.5 in)
Min. Bend Radius Operation	161 mm (6.3 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	SMF-28e+® fiber
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Typical attenuation	0.33 dB/km / 0.33 dB/km / 0.19 dB/km

* Typical attenuation values match the attenuation values listed in the optical fiber specifications. See www.corning.com/opticalfiber for Corning optical fiber specifications. Better attenuation performance options are available for some fiber and cable types. Contact Customer Care for additional fiber options.

* * SMF-28® Ultra and ClearCurve® XB fiber deliver up to 10x better macrobend loss performance compared to the G.652.D standard and up to 33 percent better macrobend loss performance than the G.657.A1 standard for 10mm radii bends.

Ordering Information

Part Number	024EUD-T4101D20
Product Description	ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable, 24 F, Single-mode (OS2)

CORNING

ALTOS® Lite™ Loose Tube, Gel-Free, Double-Jacket, Double-Armored Cable

24 F, Single-mode (OS2)

CORNING

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.
Corning Optical Communications is ISO 9001 certified. © 2014 Corning Optical Communications. All rights reserved.

CORNING