# **Closet Connector Housing Panels** (CCH-CP)

## A LANscape® **Solutions Product**

# features and benefits |

Universal design approach

One-size-fits-all LANscape® Solutions housings

Broadest range of fiber count and adapter types Solutions for all needs

Colored icon labeling

Easy connector identification


Corning Cable Systems Closet Connector Housing Panels (CCH-CP) are offered in a variety of fiber counts for use with LANscape® Solutions hardware products for a "one-size-fits-all" approach. Used with factory-installed or field-installable connectors, these panels provide interconnect or cross-connect capability in a housing at main cross-connects, intermediate cross-connects, telecommunication rooms or work areas. Available with a variety of industry-standard adapter types, the CCH-CP provides an efficient way to securely mate two connectors and offers multimode and single-mode applications in 6-, 8-, 12-, 16- and 24-fiber count options, plus 36-, 72-, 96- and 144-fiber count options with MTP® Connector adapters.









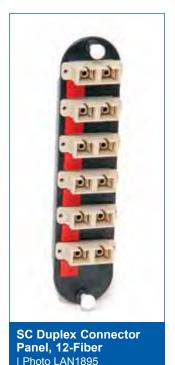





# Closet Connector Housing Panels (CCH-CP)

2

A LANscape® Solutions Product

# ordering information |

| CCH - CP |   | - 🗌 |  |  |
|----------|---|-----|--|--|
|          | 1 | 2   |  |  |

1

Select fiber count.

06 = 6 fibers

08 = 8 fibers

12 = 12 fibers

16 = 16 fibers

24 = 24 fibers

36 = 36 fibers

72 = 72 fibers

96 = 96 fibers

E4 = 144 fibers

See Note 1.

Select adapter code (see Adapter/Connector Code Options table on following page). Note:

Fiber count for desired adapter is available in table on following

# **Part Number Example**

| Part Number | Description  |
|-------------|--|
| CCH-CP12-A9 | Closet Connector Housing Pigtail Panel with 6 LC duplex single-mode adapters |





# | PRETERMINATED SYSTEMS | CABLES | CONNECTORS | CABLE ASSEMBLIES | HARDWARE | SPLICE CLOSURES | TEST EQUIPMENT | SPLICE EQUIPMENT | TRAINING

# **Closet Connector Housing Panels** (CCH-CP)

A LANscape® **Solutions Product** 

# adapter/connector code options |

| Adapter                      |   |                    |                        | Fiber/   | A  | Available Fiber/Panel Counts |     |      |        |    |    |    |     |
|------------------------------|---|--------------------|------------------------|----------|----|------------------------------|-----|------|--------|----|----|----|-----|
| Code                         | Fiber Type  | Alignment          | Housing                | Adapter  | 6  | 8                            | 12  | 16   | 24     | 36 | 72 | 96 | 144 |
| LC Duplex                    | 00.5  | 0                  | 0                      | 0        | V  | v                            | V   | V    | V      |    |    |    |     |
| A8<br>D3                     | 62.5 µm multimode (OM1)<br>50 µm multimode (OM2)  | Ceramic<br>Ceramic | Composite<br>Composite | 2<br>2   |    | X                            | X   | X    | X      |    |    |    |     |
| E4                           | 50 µm multimode (OM3/4)                           | Ceramic            | Composite              | 2        |    |                              | X   |      | X      |    |    |    |     |
| A9                           | Single-mode, UPC (OS2)                            | Ceramic            | Composite              | 2        | Χ  | Χ                            | Χ   | Χ    | Χ      |    |    |    |     |
| B3                           | Single-mode, APC (OS2)                            | Ceramic            | Composite              | 2        | Х  | X                            | Χ   | Χ    | Х      |    |    |    |     |
| SC Duplex                    | 00.5  |                    |                        | •        | ., | .,                           | .,  |      |        |    |    |    |     |
| 91<br>G7                     | 62.5 µm multimode (OM1)<br>50 µm multimode (OM2)  | Metal<br>Ceramic   | Composite<br>Composite | 2<br>2   |    | X                            |     |      |        |    |    |    |     |
| E7                           | 50 µm multimode (OM2) 50 µm multimode (OM3/4)     | Ceramic            | Composite              | 2        |    | X                            |     |      |        |    |    |    |     |
| 59                           | Single-mode, UPC (OS2)                            | Ceramic            | Composite              | 2        |    | X                            |     |      |        |    |    |    |     |
| D9                           | Single-mode, APC (OS2)                            | Ceramic            | Composite              | 2        | X  | Χ                            | Χ   |      |        |    |    |    |     |
| sc                           |   |                    |                        |          |    |                              |     |      |        |    |    |    |     |
| 56                           | 62.5 µm multimode (OM1)                           | Metal              | Composite              | 1        |    | X                            |     |      |        |    |    |    |     |
| G6<br>E6                     | 50 µm multimode (OM2)<br>50 µm multimode (OM3/4)  | Ceramic<br>Ceramic | Composite<br>Composite | 1<br>1   |    | X                            |     |      |        |    |    |    |     |
| 3C                           | Single-mode, UPC (OS2)                            | Ceramic            | Composite              | 1        |    | X                            |     |      |        |    |    |    |     |
| 6C                           | Single-mode, APC (OS2)                            | Ceramic            | Composite              | 1        |    | X                            |     |      |        |    |    |    |     |
| ST® Compa                    | tible Connector                                   |                    |                        |          |    |                              |     |      |        |    |    |    |     |
| 15T                          | 62.5 µm multimode (OM1)                           | Ceramic            | Metal                  | 1        |    | Χ                            |     |      |        |    |    |    |     |
| G5                           | 50 μm multimode (OM2)                             | Ceramic            | Metal                  | 1        |    | X                            |     |      |        |    |    |    |     |
| H3<br>19T                    | 50 µm multimode (OM3/4)<br>Single-mode, UPC (OS2) | Ceramic<br>Ceramic | Metal<br>Metal         | 1<br>1   |    | X                            |     |      |        |    |    |    |     |
|                              | Single-mode, or C (OS2)                           | Ceramic            | Metal                  | '        | ^  | ^                            | ^   |      |        |    |    |    |     |
| <b>FC</b> 11                 | Single-mode, UPC (OS2)                            | Metal              | Metal                  | 1        | X  | Х                            | X   |      |        |    |    |    |     |
| 21                           | Single-mode, APC (OS2)                            | Metal              | Metal                  | 1        |    | X                            |     |      |        |    |    |    |     |
| MT-RJ                        |   |                    |                        |          |    |                              |     |      |        |    |    |    |     |
| 97                           | 62.5 µm multimode (OM1)                           | N/A                | Composite              | 2        |    |                              | Χ   |      | Χ      |    |    |    |     |
| G1                           | 50 μm multimode (OM2)                             | N/A                | Composite              | 2        |    |                              | X   |      | Х      |    |    |    |     |
| E1<br>98                     | 50 µm multimode (OM3/4)<br>Single-mode, UPC (OS2) | N/A<br>N/A         | Composite<br>Composite | 2<br>2   |    |                              | X   |      | X<br>X |    |    |    |     |
| 90                           | Single-mode, OFC (OS2)                            | IN/A               | Composite              | 2        |    | ^                            | ^   | ^    | ^      |    |    |    |     |
| MTP® Conn                    |   | NI/A               | Camanasita             | 40       |    |                              |     |      |        | V  | V  | V  | V   |
| 69<br>G3                     | 62.5 µm multimode (OM1)<br>50 µm multimode (OM2)  | N/A<br>N/A         | Composite<br>Composite | 12<br>12 |    |                              |     |      |        | X  | X  | X  | X   |
| E3                           | 50 µm multimode (OM3/4)                           | N/A                | Composite              | 12       |    |                              |     |      |        |    | X  |    |     |
| 90                           | Single-mode (OS2)                                 | N/A                | Composite              | 12       |    |                              |     |      |        | Χ  | Χ  | Χ  | Χ   |
| Fiber Type                   |   | Housing Cold       | or, Simplex and D      | Duplex   | Н  | ous                          | ing | Colc | or, M  | TP |    |    |     |
| 62.5 µm multi                |   | Beige              |                        |          |    | lack                         |     |      |        |    |    |    |     |
| 50 µm multim                 |   | Black              |                        |          |    | lack                         |     |      |        |    |    |    |     |
| 50 µm multim<br>Single-mode, |   | Aqua               |                        |          |    | qua                          |     |      |        |    |    |    |     |
| Single-mode,<br>Single-mode, |   | Blue<br>Green      |                        |          |    | lack<br>lack                 |     |      |        |    |    |    |     |
| Jg.3 111040,                 |   |                    |                        |          |    |                              | -   |      |        |    |    |    |     |





# **Closet Connector Housing Panels** (CCH-CP)

A LANscape® Solutions Product

ordering information | (continued)

| Colored Icons (pack of 50)  |
|---|
| ICN -   |
| <b>[</b> 1  |
| Select icon. Blank Icons  |
|   |
| YLB = Blank (Yellow) RDB = Blank (Red) GRB = Blank (Green) BLB = Blank (Blue) WTB = Blank (White) BGB = Blank (Beige) ORB = Blank (Orange) Etched Icons |
|   |
| BLP = Phone (Blue)  |
| RDC = Computer (Red)  CATV  |
| GRT = Cable TV (Green)  |

Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA 800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/cablesystems

Corning Cable Systems reserves the right to improve, enhance and modify the features and specifications of Corning Cable Systems products without prior notification. LANscape is a registered trademark of Corning Cable Systems Brands, Inc. MTP is a registered trademark of USConec, Ltd. ST is a registered trademark of Lucent Technologies. All other trademarks are the properties of their respective owners. Corning Cable Systems is ISO 9001 certified. © 2007, 2012 Corning Cable Systems. All rights reserved. Published in the USA. LAN-133-EN / February 2012



