


FBWLCUC11



TeraSPEED® LC to Unconnectorized, Fiber Pigtail, 0.9 mm Riser - SBJ

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber pigtail, simplex
Product Brand	TeraSPEED®
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration


General Specifications

Color, boot A	Blue
Color, connector A	Blue
Construction Type	Pigtail, jacketed
Interface, Connector A	LC/UPC
Jacket Color	Yellow
Total Fibers, quantity	1

Dimensions

Cable Assembly Length, minimum (ft)	2
Cable Assembly Length, maximum (ft)	23
Cable Assembly Length, minimum (m)	1
Cable Assembly Length, maximum (m)	7

Ordering Tree

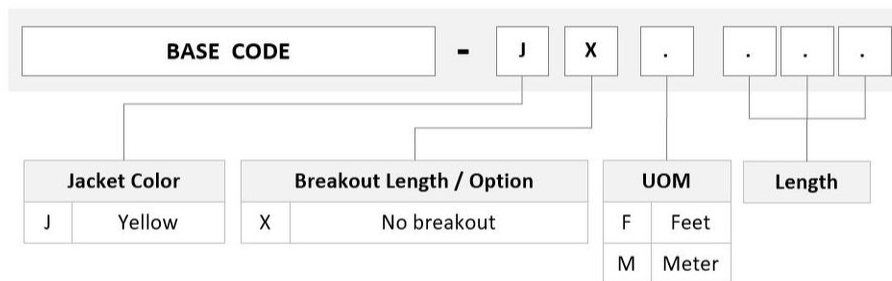

Mechanical Specifications

Cable Retention Strength, maximum	2.00 lb @ 90 °	5.00 lb @ 0 °
--	----------------	---------------

Optical Specifications

Fiber Type	G.652.D and G.657.A1 , TeraSPEED®	OS2
-------------------	-----------------------------------	-----

Insertion Loss, maximum, connector A	0.25 dB
--------------------------------------	---------

Return Loss, minimum, connector A	50 dB
--	-------

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Low Smoke Zero Halogen (LSZH) | Riser

FBWLCUC11

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant



Included Products

7 6 0 1 6 5 1 2 6
N-001-RF-8W-F09BL — TeraSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered Fiber Cable