

## Fiber Optic, Patch Panel, Sliding (unloaded)

### Features and benefits

- Fast and easy access to front and rear connectors
- Wide range of connector types (SC and LC standard)
- Suitable for pigtail splicing or IFC Breakout cables
- Wide range of cable types can be installed at the rear
- Various anchoring points for incoming cables
- Clear port identification strip on front plate
- Fiber-management kits and splice cassette are offered as accessories
- All panels are available pre-loaded with adapters, pigtails and splice accessories



### Description


The Opterna Fiber Optic 19" Sliding Patch Panel has been designed to facilitate internal fiber management and also to maximize fiber density in 1U, 2U and 4U height increments.

The sliding tray provides easy access to fiber cabling, making this panel ideal for 'Pay as you Grow' applications. The panel supports 24 way, 48 way and 96 way configurations in SC Simplex, SC Duplex, ST/FC (D cut out), LC Duplex (SC simplex foot print), LC Quad (SC Duplex foot print). Versions are available with MTP MPO cut-outs on the back for use with pre-terminated MTP/MPO trunks.

### Technical data

Mechanical data	Value
Dimensions (W x D x H)	See technical drawing
Material	Steel powder-coated
Height variants	1U, 2U and 4U

### Technical drawing

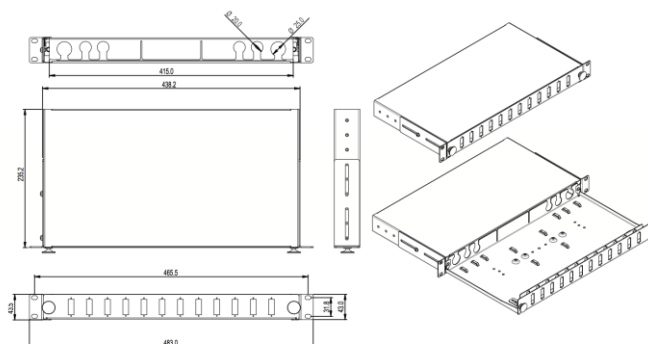

**Ordering information**
**FPSSL-**
**1**
**2**
**3**
**4**

1.	Select cut-out type SCSX- = SC simplex SCDX- = SC duplex DCSX- = ST/FC 'D' cut-out	3.	Select panel height in 'U' 1 = 1U 2 = 2U 4 = 4U
2.	Number of fibers per panel 012 = 12 fibers 024 = 24 fibers 048 = 48 fibers	4.	Select panel colour G = Gray powder coated B = Black powder coated

Accessories	Part code
Universal splice cassette for two splice holders, unloaded	OPFC-STGR24
Cover for splice cassette	OPFC-STGR24-L
Holder for 12 ANT sandwich splice protectors	OPFC-STGR24-CH
Holder for 6 heatshrink splice protectors	OPFC-STGR24-SH
Stacking hinge for OPFC-STGR24	OPFC-STGR24-CH
12-way stackable splice cassette with splice holder and cover (180mm x 108mm x 13mm)	SPTR-1224-BK
24-way stackable splice cassette with splice holder and cover (225mm x 108mm x 13mm)	SPTR-1224-WH
24-way stackable splice cassette with splice holder and cover (160mm x 105mm x 10mm)	SPTR-1224-BL
24-way splice bridge with adhesive strip and cover	FP-AC-SB-24
PG13.5 (5-9mm) cable gland and nut, black nylon material	FP-AC-CG-13B
PG16 (10-14mm) cable gland and nut, black nylon material	FP-AC-CG-16B
Bunny clip	FP-AC-BC
Fiber management kit consisting of 1 x FP-AC-CG-13B and 8 x FP-AC-BC	FP-AC-FMK
SC simplex blanking plug	FP-AC-BLNK-SCSX
SC duplex blanking plug	FP-AC-BLNK-SCDX
ST/FC simplex blanking plug	FP-AC-BLNK-DCSX
60mm x 3mm heatshrink splice sleeve	PSCL-600-15-30
60mm x 2.5mm heatshrink splice sleeve	PSCL-600-15-25

Also, available in Black (BK), Blue (BL), Green(GN), Orange (OR), Red (RD), White (WH), Yellow (YL) for bulk orders